


**PRESSURE-, VACUUM-, AND COMPOUND GAUGES
63, 80 OG 100 MM. FOR FLUSH PANEL MOUNTING.**

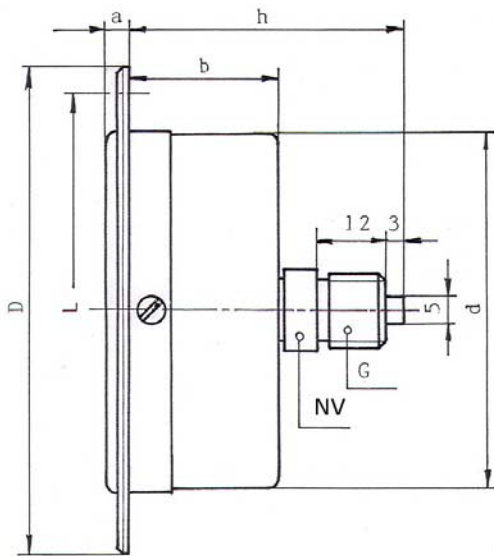

DIMENTIONAL DATA IN MM.

TYPE NO.	d	D	L	b	a	NV	G	h
121 F	63	85	75	26	4,5	14	1/4" BSP	48
221 F	80	110	95	26	5,5	14	1/4" BSP	48
321 F	100	133	116	26	5,5	14	1/4" BSP	48

- NORM** : 837-1
CASE : Steel black enameled with instrument glass
FRONT FLANGE RING : Brass chromium plated
SCALE : White with black figures. 270 ° defl. (Red adjustable marking pointer type 221 and 321)
MEASURING SYSTEM : Brass / bronze
PROTECTION : IP 45 (EN 60529)
AMBIENT TEMP. : -25....+60 °C
ACCURACY : 1,6

PRESSURE GAUGES				VACUUM GAUGES		COMPOUND GAUGES	
RANGES (bar)	DIV.	RANGES (bar)	DIV.	RANGES (bar)	DIV.	RANGES (bar)	DIV.
0-0,6	: 0,01	0-25	: 0,5	-1-0	: 0,02	-1-0-0,6	: 0,05
0-1	: 0,02	0-40	: 1			-1-0-1,5	: 0,05
0-1,6	: 0,05	0-60	: 1			-1-0-3	: 0,1
0-2,5	: 0,05	0-100	: 2			-1-0-5	: 0,1
0-4	: 0,1	0-160	: 5			-1-0-9	: 0,2
0-6	: 0,1	0-250	: 5			-1-0-15	: 0,5
0-10	: 0,2	0-400	: 10				
0-16	: 0,2						

OPTIONS:

- Red marking on dial
- Restrictor screw
- Accuracy +/- 1 % (class 1,0)
- Maximum pointer
- Another thread connection
- Customer logo

